

Chapter 20. Elementary Graph Algorithms

Joon Soo Yoo

May 29, 2025


Assignment

- ▶ Read §20.2, §20.3
- ▶ Problems
 - ▶ §20.2 - 1



Chapter 20: Elementary Graph Algorithms

- ▶ Chapter 20.1: Representations of Graphs
- ▶ **Chapter 20.2: Breadth-First Search**
- ▶ Chapter 20.3: Depth-First Search
- ▶ Chapter 20.4: Topological Sort
- ▶ Chapter 20.5: Strongly Connected Components

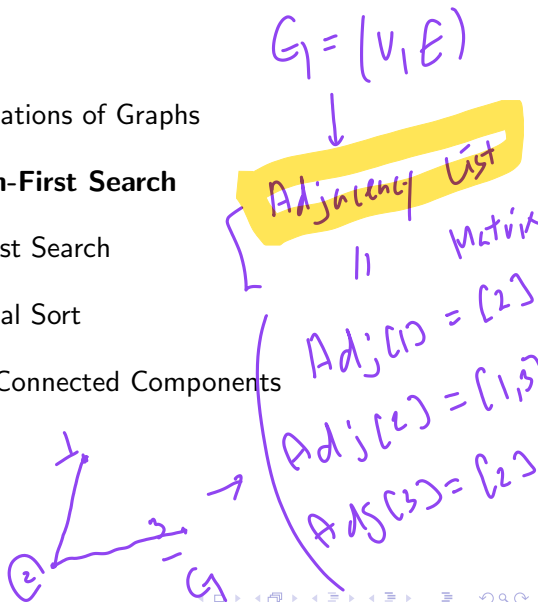

Breadth-First Search (BFS): Introduction

↓ ↓ ↓




DFS

Depth-first Search (2013)

- ▶ Breadth-First Search (BFS) is a fundamental graph traversal algorithm.
- ▶ It serves as the foundation for more advanced algorithms, such as:
 - ▶ Prim's Minimum Spanning Tree algorithm (§21.2)
 - ▶ Dijkstra's Single-Source Shortest Paths algorithm (§22.3)

Purpose of BFS

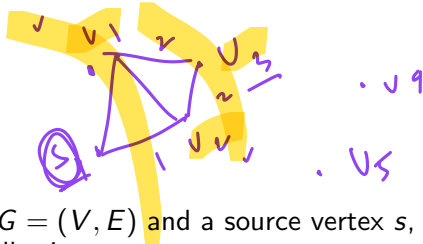

- ▶ Given a graph $G = (V, E)$ and a source vertex s , BFS performs the following:
 - ▶ Systematically explores all vertices reachable from s .
 - ▶ Computes the shortest path (in edge count) from s to each reachable vertex v .
 - ▶ Builds a **breadth-first tree** rooted at s containing all reachable vertices.
- ▶ For each reachable vertex v , the path from s to v in the BFS tree is a shortest path in G .



Why It's Called Breadth-First

- ▶ BFS explores the graph level by level, or in “waves”:
 - ▶ First it discovers all vertices at distance 1 from s .
 - ▶ Then all vertices at distance 2, and so on.
- ▶ This layered discovery is why it's called “breadth-first”.



Queue-Based Exploration

BFS

$$G = (V, E)$$

Q



- ▶ BFS uses a single **first-in, first-out (FIFO) queue** to manage the frontier of exploration.
- ▶ At any point, the queue contains some vertices at distance k and possibly some at distance $k + 1$.
- ▶ This queue maintains the order of discovery and ensures vertices are processed by increasing distance.

Coloring Scheme and Tree Structure

- ▶ BFS uses a color scheme to track the state of each vertex:

- ▶ **WHITE**: undiscovered

- ▶ **GRAY**: discovered but not fully explored (in queue)

- ▶ **BLACK**: fully explored

- ▶ Initially, all vertices are white; unreachable vertices remain white.



- ▶ Each time a white vertex v is discovered from a gray vertex u , BFS:

- ▶ Marks v gray and adds it to the queue

- ▶ Sets $v.d = u.d + 1$

- ▶ Sets $v.\pi = u$ and adds edge (u, v) to the BFS tree

- ▶ Once all neighbors of u are explored, u is marked black.

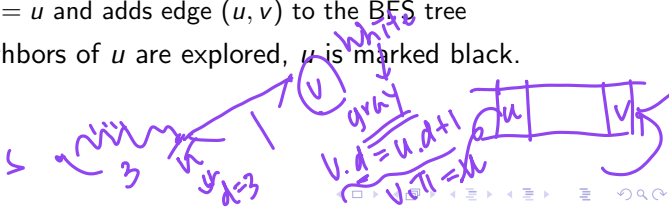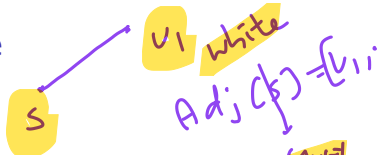

BFS: Inputs and Vertex Attributes

- ▶ BFS operates on a graph $G = (V, E)$ represented as an **adjacency list**.
- ▶ Each vertex $v \in V$ maintains three attributes:
 - ▶ $v.\text{color} \in \{\text{WHITE}, \text{GRAY}, \text{BLACK}\}$
 - ▶ $v.d$: distance from source vertex s
 - ▶ $v.\pi$: predecessor (or parent) in the BFS tree
- ▶ A **queue** Q is used to manage discovered (GRAY) vertices.



BFS Algorithm

BFS(G, s)

```
1  for each vertex  $u \in G.V - \{s\}$ 
2     $u.color = \text{WHITE}$ 
3     $u.d = \infty$ 
4     $u.\pi = \text{NIL}$ 
5   $s.color = \text{GRAY}$ 
6   $s.d = 0$ 
7   $s.\pi = \text{NIL}$ 
8   $Q = \emptyset$ 
9  ENQUEUE( $Q, s$ )
10 while  $Q \neq \emptyset$ 
11    $u = \text{DEQUEUE}(Q)$ 
12   for each vertex  $v$  in  $G.Adj[u]$ 
13     if  $v.color == \text{WHITE}$ 
14        $v.color = \text{GRAY}$ 
15        $v.d = u.d + 1$ 
16        $v.\pi = u$ 
17       ENQUEUE( $Q, v$ )
18    $u.color = \text{BLACK}$ 
```

$O(E)$

X




// search the neighbors of u
// is v being discovered now?

$\sum_{u \in V} |Adj(u)| = 2E$


// v is now on the frontier
// u is now behind the frontier

Understanding the BFS Queue

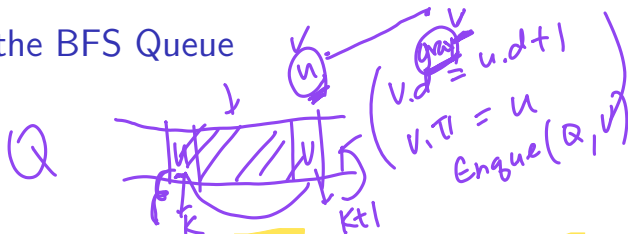

- ▶ The queue Q maintains the **frontier** — vertices discovered but not fully explored.
- ▶ Invariant: at any time, Q contains only GRAY vertices.
- ▶ Vertices are dequeued in the order they were discovered, ensuring:
 - ▶ Vertices at distance k are fully explored before those at $k + 1$
 - ▶ This leads to the correct computation of shortest paths

BFS Diagram

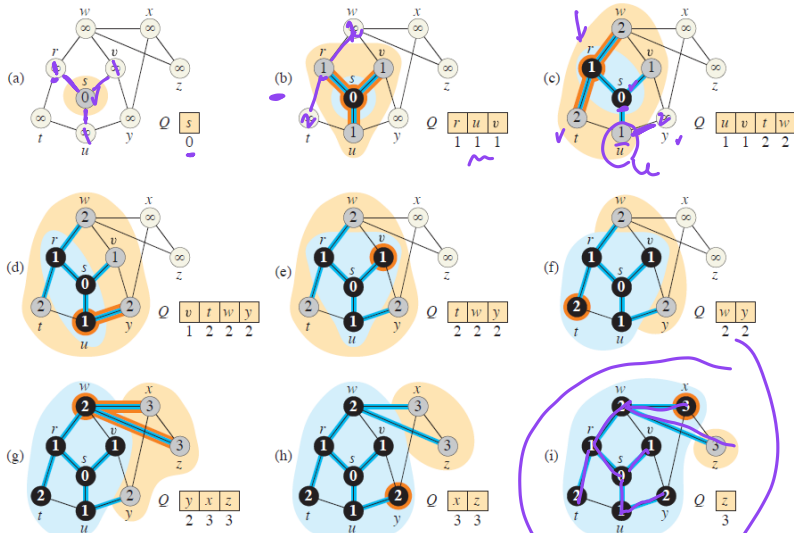

BFS: Time Complexity Analysis

- ▶ Let the input graph be $G = (V, E)$ and represented as an adjacency list.
- ▶ BFS performs the following:
 - ▶ **Initialization:** each vertex is colored and initialized once
 $\Rightarrow O(V)$
 - ▶ **Queue operations:**
 - ▶ Each vertex is enqueued and dequeued at most once
 - ▶ Each enqueue/dequeue takes $O(1)$ time
 - ▶ Total queue time: $O(V)$
 - ▶ **Adjacency list scanning:**
 - ▶ Each vertex's adjacency list is scanned once when it is dequeued
 - ▶ Total length of all adjacency lists: $\Theta(E)$
 - ▶ Total scanning time: $\Theta(E)$
- ▶ **Total time complexity:** $O(V + E)$
- ▶ BFS runs in linear time relative to the size of the input graph.




Shortest Paths and BFS: Lemma 20.1 ✓

$$\delta(s, v) = \text{minimum dist}$$
$$\delta(s, v) = \infty \quad \times$$

Lemma

Let $G = (V, E)$ be a directed or undirected graph, and let $s \in V$. Define $\delta(s, v)$ as the **shortest-path distance** from s to v , i.e., the minimum number of edges in any path from s to v . If v is unreachable from s , then $\delta(s, v) = \infty$. Then, for any edge $(u, v) \in E$, we have:

$$\delta(s, v) \leq \delta(s, u) + 1$$

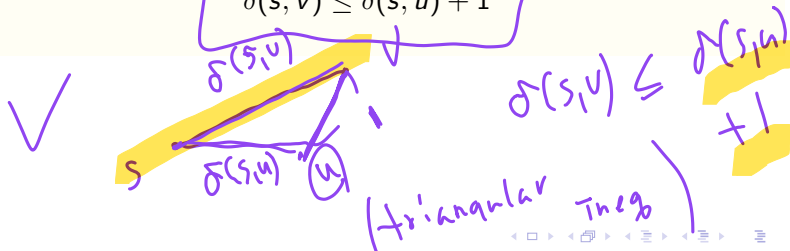

Proof of Lemma 20.1



► **Case 1:** u is reachable from s

- Then there is a shortest path from s to u of length $\delta(s, u)$
- Since $(u, v) \in E$, we can extend this path by one edge to reach v
- So, there exists a path from s to v of length $\delta(s, u) + 1$
- Therefore, $\delta(s, v) \leq \delta(s, u) + 1$

► **Case 2:** u is not reachable from s

- Then $\delta(s, u) = \infty$
- So $\delta(s, v) \leq \infty + 1 = \infty$
- Inequality still holds

$$\delta(s, v) \leq \delta(s, u) + 1$$

$$\delta(s, v) \leq \infty + 1 = \infty$$

Lemma 20.2 ✓



Lemma

Let $G = (V, E)$ be a directed or undirected graph, and suppose BFS is run from a source vertex $s \in V$. Then for every vertex $v \in V$, the value $v.d$ computed by BFS satisfies:

$$v.d \geq \delta(s, v)$$

This holds at all times during the execution of BFS, including at termination.

Proof of Lemma 20.2

$$(s).d = 0 = \delta(s, s)$$

- ▶ **Proof by induction on the number of ENQUEUE operations.**

- ▶ **Base case:** after enqueueing s (line 9 of BFS)

- ▶ $s.d = 0 = \delta(s, s)$
- ▶ All other vertices v have $v.d = \infty \geq \delta(s, v)$

$$s.d \geq \delta(s, s)$$

$$v.d \geq \delta(s, v)$$

- ▶ **Inductive step:** suppose a white vertex v is discovered from u

- ▶ By inductive hypothesis: $u.d \geq \delta(s, u)$
- ▶ BFS sets $v.d = u.d + 1$
- ▶ By Lemma 20.1: $\delta(s, v) \leq \delta(s, u) + 1$
- ▶ Therefore:

$$v.d = u.d + 1 \geq \delta(s, u) + 1 \geq \delta(s, v)$$

- ▶ Once set, $v.d$ never changes again.
- ▶ Hence, the inductive hypothesis is maintained.

Diagram showing vertex v connected to vertex u . Handwritten notes show the derivation of the distance property for v :

$$u.d \geq \delta(s, u)$$
$$v.d = u.d + 1$$
$$v.d \geq \delta(s, v)$$

Lemma 20.3: Structure of the BFS Queue

Lemma

Suppose that during the execution of BFS on a graph $G = (V, E)$, the queue Q contains the vertices $\langle v_1, v_2, \dots, v_r \rangle$, where v_1 is at the head and v_r is at the tail. Then:

- ① $v_r.d \leq v_1.d + 1$
- ② $v_i.d \leq v_{i+1}.d$ for $i = 1, 2, \dots, r-1$

- That is, the d -values in the queue are either all equal or increase from k to $k+1$.



$$v_1.d \leq v_2.d$$

Proof Sketch of Lemma 20.3

- ▶ **Proof by induction** on the number of queue operations (enqueue/dequeue).
- ▶ **Base case:** Queue starts as $Q = [s]$. Then $s.d = 0$, and the lemma trivially holds.

- ▶ **Dequeue step:**

- ▶ Removing v_1 shifts the queue to $\langle v_2, \dots, v_r \rangle$.
- ▶ By induction: $v_r.d \leq v_1.d + 1 \leq v_2.d + 1$, so the inequality is maintained.

$$\langle v_1, v_2, \dots, v_r \rangle$$

$$v_r.d \leq v_2.d + 1$$

- ▶ **Enqueue step:**

- ▶ Suppose v is discovered via v_1 .
- ▶ Then $v.d = v_1.d + 1$, and v is enqueued at the end.
- ▶ At that time, $v_r.d \leq v_1.d + 1 = v.d$, so the non-decreasing order is preserved.

$$\langle v_2, \dots, v_r, v \rangle$$

- ▶ In both enqueue and dequeue steps, the d -value ordering in the queue remains valid.

$$v_r.d \leq v_1.d + 1 = v.d \quad v_1 \longleftarrow v \quad v.d = v_1.d + 1$$

Corollary 20.4




Corollary

Suppose vertices v_i and v_j are enqueued during BFS and v_i is enqueued before v_j . Then at the moment v_j is enqueued,

$$v_i.d \leq v_j.d.$$

- ▶ Follows directly from Lemma 20.3: the queue maintains non-decreasing d -values.
- ▶ Since vertices are enqueued only once, the distance of v_j must be at least that of v_i .

(B f s)



- ▶ Every vertex v reachable from s is discovered by BFS.
- ▶ Upon termination, $v.d = \delta(s, v)$ for all $v \in V$.
- ▶ Moreover, for any reachable $v \neq s$, one of the shortest paths from s to v is formed by taking a shortest path to $v.\pi$ and following the edge $(v.\pi, v)$.


$$V_d = \sigma(s, v)$$

20.1–20.3.

Correctness of BFS (Part 2): Assume a Contradiction

$$\begin{array}{c} \cdot v \\ v.d \end{array} \quad \underline{v.d \neq \delta(s, v)}$$

- ▶ Suppose some vertex v receives $v.d \neq \delta(s, v)$.
- ▶ Let v be a vertex with minimum $\delta(s, v)$ among such incorrect vertices.
- ▶ By Lemma 20.2: $v.d \geq \delta(s, v)$. So if incorrect, $v.d > \delta(s, v)$.
- ▶ $v \neq s$ (since $s.d = 0 = \delta(s, s)$).
- ▶ Let u be the predecessor of v on a shortest path from s .
- ▶ Then $\delta(s, v) = \delta(s, u) + 1$.
- ▶ By minimality of v , $u.d = \delta(s, u)$.

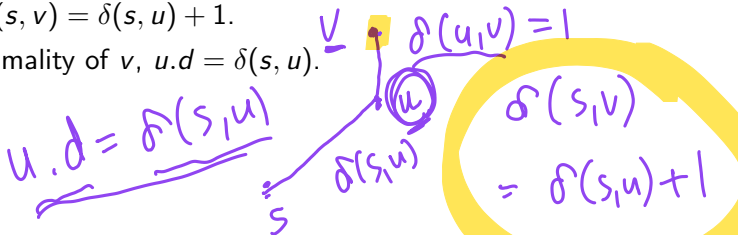

Correctness of BFS (Part 3): Analyze When u is Dequeued

Now consider the moment BFS dequeues u from Q :

- ▶ Vertex v must be white, gray, or black at this point.
- ▶ **Case 1: v is white:**
 - ▶ Then BFS sets $v.d = u.d + 1$.
 - ▶ But $u.d = \delta(s, u)$, so $v.d = \delta(s, v)$ (**contradiction**).
- ▶ **Case 2: v is black:**
 - ▶ Then v has already been removed from Q .
 - ▶ By Corollary 20.4: $v.d \leq u.d$.
 - ▶ So $v.d \leq \delta(s, u) < \delta(s, v)$ (**contradiction**).

$v.d \leq \delta(s, u) \leq \delta(s, v)$

$u.d \geq v.d$ in

Correctness of BFS (Part 4): Remaining Case v is Gray

(v) gray

► Case 3: v is gray:

- Then v was discovered while dequeuing some earlier vertex w .
 - So $v.d = w.d + 1$.
 - By Corollary 20.4: $w.d \leq u.d = \delta(s, u)$.
 - So $v.d = w.d + 1 \leq u.d + 1 = \delta(s, v)$ (**contradiction**).
- In all cases, we reached a contradiction.
- Therefore, $v.d = \delta(s, v)$ for all v .

$$v.d = w.d + 1 \leq u.d + 1 \\ \leq \delta(s, u) + 1 = \delta(s, v)$$

Breadth-First Trees



- ▶ As BFS explores the graph from a source s , it builds a tree structure rooted at s .
- ▶ Each vertex v reachable from s gets a parent $v.\pi$ from which it was discovered.
- ▶ These parent pointers form the **predecessor subgraph**, which encodes shortest paths from s .

Visual: Blue edges in Figure 20.3 represent this tree structure.



Definition: Predecessor Subgraph

$$G_\pi = (V_\pi, E_\pi)$$

Let $G = (V, E)$ be a graph with source vertex s . The **predecessor subgraph** $G_\pi = (V_\pi, E_\pi)$ is defined as:

$$\begin{aligned} V_\pi &= \{v \in V \mid v.\pi \neq \text{NIL}\} \cup \{s\} \\ E_\pi &= \{(v.\pi, v) \mid v \in V_\pi \setminus \{s\}\} \end{aligned}$$

$$v.\pi \neq \text{NIL}$$


- ▶ This forms the tree structure discovered by BFS.
- ▶ Each edge $(v.\pi, v)$ is called a **tree edge**.

$$(v.\pi, v)$$

Lemma 20.6: BFS Builds a Breadth-First Tree

Lemma

When BFS is applied to a graph $G = (V, E)$ from a source vertex $s \in V$, the resulting predecessor subgraph $G_\pi = (V_\pi, E_\pi)$ forms a breadth-first tree.



Proof of Lemma 20.6


- ▶ Line 16 of BFS sets $v.\pi = u$ only if $(u, v) \in E$ and v is undiscovered.
- ▶ Therefore, v is reachable from s , and so V_π consists of all vertices reachable from s .
- ▶ The set $E_\pi = \{(v.\pi, v) \mid v \in V_\pi \setminus \{s\}\}$ defines edges from each discovered node to its predecessor.
- ▶ By Theorem B.2, since G_π is connected and has $|V_\pi| - 1$ edges, it forms a tree.
- ▶ From Theorem 20.5, $v.d = \delta(s, v)$, and each $(v.\pi, v)$ lies on a shortest path.
- ▶ Thus, G_π is a tree of shortest paths: a breadth-first tree.

Exercise: BFS Tree Construction

Graph Description:

Consider the undirected graph $G = (V, E)$ with vertex set $V = \{1, 2, 3, 4, 5\}$. The graph is given in adjacency list form:

- ▶ $\text{Adj}[1] = [2, 3]$
- ▶ $\text{Adj}[2] = [1, 4, 5]$
- ▶ $\text{Adj}[3] = [1, 4]$
- ▶ $\text{Adj}[4] = [2, 3, 5]$
- ▶ $\text{Adj}[5] = [2, 4]$

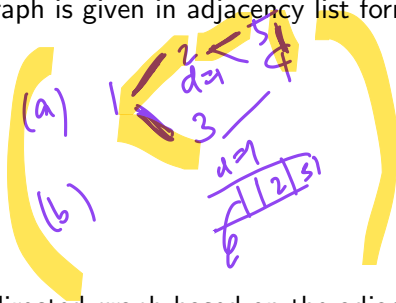

Tasks:

- Draw the original undirected graph based on the adjacency list.
- Run **BFS** starting from the source vertex $s = 1$. For each vertex, record:
 - ▶ Its distance $v.d$ from the source.
 - ▶ Its predecessor $v.\pi$ in the BFS tree.
- Draw the **breadth-first tree** formed by BFS. Include only the tree edges determined by the π values.


BFS Print Path

$v=5$



PRINT-PATH(G, s, v)

```
1  if  $v == s$ 
2      print  $s$ 
3  elseif  $v.\pi == \text{NIL}$ 
4      print "no path from"  $s$  "to"  $v$  "exists"
5  ( else PRINT-PATH( $G, s, v.\pi$ )
6      print  $v$  )
```

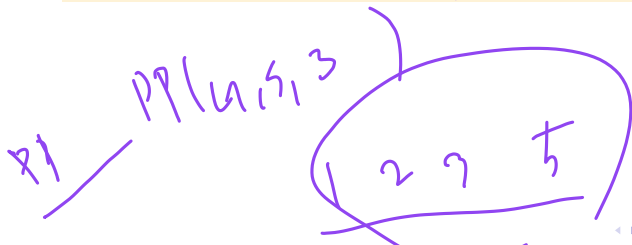

Question?