

Chapter 12. Binary Search Tree

Joon Soo Yoo

May 8, 2025

Assignment

- ▶ Read §12.1, 12.2
- ▶ Problems
 - ▶ §12.1 - 1, 3
 - ▶ §12.2 - 1, 3, 5

Chapter 12: Binary Search Trees

- ▶ **Chapter 12.1: What is a Binary Search Tree?**
- ▶ Chapter 12.2: Querying a Binary Search Tree
- ▶ Chapter 12.3: Insertion and Deletion

Binary Search Trees: Overview

- ▶ **BSTs support fundamental dynamic-set operations:**
 - ▶ SEARCH, MINIMUM, MAXIMUM, PREDECESSOR, SUCCESSOR, INSERT, DELETE
- ▶ **Operation running time depends on tree height:**
 - ▶ $\Theta(\lg n)$ in the best case (balanced BST)
 - ▶ $\Theta(n)$ in the worst case (degenerate / linear BST)

BST as Dictionary and Priority Queue

▶ **BST as a Dictionary:**

- ▶ Supports dynamic set operations:
 - ▶ SEARCH
 - ▶ INSERT
 - ▶ DELETE
- ▶ Store and retrieve key-value pairs efficiently (when balanced).

▶ **BST as a Priority Queue:**

- ▶ Supports priority queue operations:
 - ▶ **MINIMUM / MAXIMUM** (find smallest or largest key)
 - ▶ **DELETE-MIN / DELETE-MAX** (delete smallest or largest key)
- ▶ Can maintain ordered keys dynamically.

Binary Search Tree: Structure

- ▶ **A Binary Search Tree (BST)** is organized as a binary tree.
- ▶ Each node contains:
 - ▶ **Key** and satellite data
 - ▶ **Pointers:** left child, right child, and parent (left, right, p)
 - ▶ Missing **child** or parent → stored as NIL
- ▶ **Root pointer (T.root):**
 - ▶ Points to the **root** of the tree
 - ▶ T.root.p is always NIL

Binary-Search-Tree Property

► Ordering rule:

► For any node x :

► All keys in the left subtree of $x \leq x.key$

► All keys in the right subtree of $x \geq x.key$


► Implication:

► BST naturally supports sorted order traversal.


► Different BSTs can represent the same set of keys $\rightarrow$ shape and height may vary.

BST Diagram



TW(6)

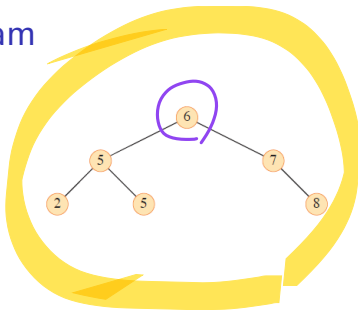

$\Theta(n)$



(a)



(b)

BST Supports Sorted Order Traversal

▶ **Inorder Traversal:**

- ▶ Visits nodes in order: **Left → Node → Right**
- ▶ For BSTs, this produces keys in ascending (sorted) order.


▶ **Example:**

- ▶ BST structure:
 - ▶ Left subtree → smaller keys
 - ▶ Right subtree → larger keys
- ▶ Inorder traversal naturally visits:

smallest → ... → largest

- ▶ **Thus, BST + Inorder traversal = Sorted order output.**

Inorder Tree Walk (Algorithm)

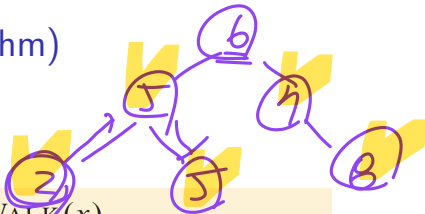

INORDER-TREE-WALK(x)

1 if $x \neq \text{NIL}$

2 INORDER-TREE-WALK($x.\text{left}$)

3 print $x.\text{key}$

4 INORDER-TREE-WALK($x.\text{right}$)

TW(6)

TW(5)

TW(2)

TW(5)

TW(7)

► **Example:** Inorder traversal of Figure 12.1 prints keys in order:

2, 5, 5, 6, 7, 8

Inorder Tree Walk takes $\Theta(n)$ Time

► Theorem 12.1

If x is the root of an n -node subtree, then the call:

INORDER-TREE-WALK(x)

takes **$\Theta(n)$** time.



► Intuition:

- Every node is visited exactly once $\rightarrow$ at least $\Omega(n)$
- Each visit takes constant work $\rightarrow$ total time is $O(n)$

Proof of Theorem (Part 1)

► Base Case:

- Empty subtree $\rightarrow n = 0$:

$$T(0) = c$$

$$T(n)$$

$$T(0) = c$$

for some constant $c > 0$.

► Recursive Case ($n > 0$):

- Left subtree $\rightarrow k$ nodes $\rightarrow T(k)$
- Right subtree $\rightarrow n - k - 1$ nodes $\rightarrow T(n - k - 1)$
- Current node $\rightarrow$ constant work d

$$T(n) \leq T(k) + T(n-k-1)$$


$$+ d$$

✓

$$T(n) \leq T(k) + T(n - k - 1) + d$$

► Goal: Show

$$T(n) = O(n)$$



$$T(n) \leq O(n)$$

Proof of Theorem (Part 2)

- Guess (**substitution method**):

$$m < n \quad \checkmark \quad \Theta(n)$$

$$T(m) \leq (c + d) \cdot m + c$$

- Substitute into recurrence:

$$T(n) \leq (c + d)k + c + (c + d)(n - k - 1) + c + d$$

- Simplify:

$$T(n) \leq (c + d)n + c$$

$$= (c + d)n + c - (c + d) + c + d$$

$$= (c + d)n + c$$

→ Matches the guess → proof complete.

$$\left[\begin{array}{l} T(n) = O(n) \\ T(n) = \Omega(n) \end{array} \right]$$

- Final conclusion:

$$T(n) = \Theta(n)$$

$$\Theta(n)$$

Chapter 12: Binary Search Trees

- ▶ Chapter 12.1: What is a Binary Search Tree?
- ▶ **Chapter 12.2: Querying a Binary Search Tree**
- ▶ Chapter 12.3: Insertion and Deletion

Queries Supported by Binary Search Trees

- ▶ Binary Search Trees can support:

- ▶ SEARCH
- ▶ MINIMUM
- ▶ MAXIMUM
- ▶ PREDECESSOR
- ▶ SUCCESSOR

- ▶ **Running time:**

- ▶ Each operation takes $O(h)$ time, where h is the height of the tree.

Searching in BST (Alg)

TREE-SEARCH(x, k)

```
1  if  $x == \text{NIL}$  or  $k == x.\text{key}$ 
2      return  $x$ 
3  if  $k < x.\text{key}$ 
4      return TREE-SEARCH( $x.\text{left}, k$ )
5  else return TREE-SEARCH( $x.\text{right}, k$ )
```



ITERATIVE-TREE-SEARCH(x, k)

```
1  while  $x \neq \text{NIL}$  and  $k \neq x.\text{key}$ 
2      if  $k < x.\text{key}$ 
3           $x = x.\text{left}$ 
4      else  $x = x.\text{right}$ 
5  return  $x$ 
```


- ▶ $k < x.\text{key} \rightarrow$ Go left
- ▶ $k > x.\text{key} \rightarrow$ Go right

Searching in BST (Diagram)

13

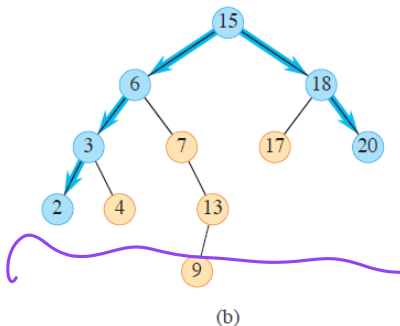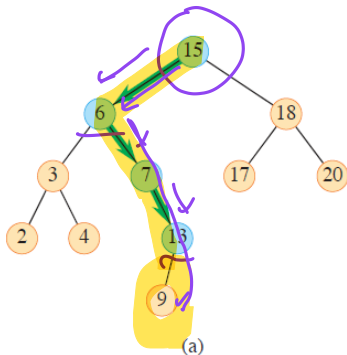

Finding Minimum and Maximum in BST

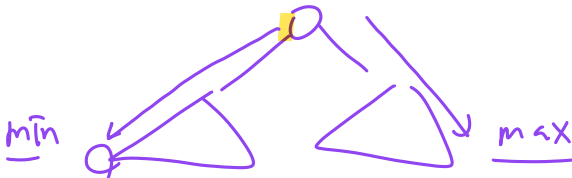

Minimum and Maximum Queries:

- ▶ Follow child pointers from the root:
 - ▶ **Minimum:** follow left child pointers.
 - ▶ **Maximum:** follow right child pointers.

Finding Minimum/Maximum in BST

TREE-MINIMUM(x)

```
1  while  $x.left \neq \text{NIL}$ 
2       $x = x.left$ 
3  return  $x$ 
```

TREE-MAXIMUM(x)

```
1  while  $x.right \neq \text{NIL}$ 
2       $x = x.right$ 
3  return  $x$ 
```

Why TREE-MINIMUM is Correct

- ▶ **Binary-Search-Tree Property:**

- ▶ Left subtree keys $\leq$ Current node
- ▶ Right subtree keys $\geq$ Current node

- ▶ **Two Cases:**

- ▶ No left child $\rightarrow$ current node is minimum.
- ▶ Has left child $\rightarrow$ smaller key exists $\rightarrow$ minimum is in left subtree $\rightarrow$ follow left.

- ▶ **TREE-MAXIMUM is symmetric $\rightarrow$ follow right for maximum.**

Running Time of Minimum and Maximum

- ▶ **Follow one simple path downward:**
 - ▶ Minimum $\rightarrow$ only follow left children.
 - ▶ Maximum $\rightarrow$ only follow right children.
- ▶ **Running time is proportional to the height of the tree:**

$O(h)$ time

- ▶ **Tree height:**
 - ▶ Balanced BST $\rightarrow O(\log n)$
 - ▶ Worst-case unbalanced BST $\rightarrow O(n)$

Importance of Balancing in BST

(search min/max)

- ▶ **BST operation time depends on tree height h :**

$$O(h)$$

- ▶ **Balanced vs Unbalanced BST:**

- ▶ **Balanced tree:** $h = O(\log n)$ → Fast operations.
- ▶ **Unbalanced tree (degenerate):** $h = O(n)$ → Slow operations.


- ▶ **Solution: Self-balancing trees (next chapters).**

- ▶ **Red-Black Trees** (Chapter 13)
- ▶ **AVL Trees, B-Trees** (other types)

- ▶ **Summary:**

- ▶ **Balancing is crucial** → ensures $O(\log n)$ height → efficient search, insert, and delete.

Finding Successor in BST (Diagram)

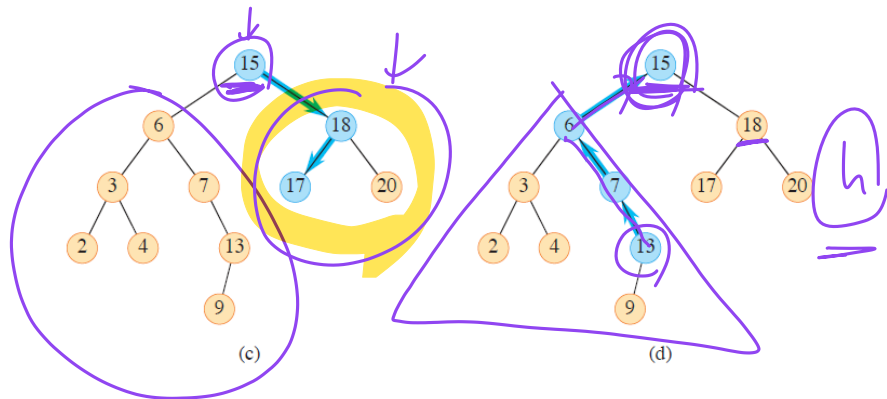

Finding Successor in BST (Algorithm)

TREE-SUCCESSOR(x)

```
1  if  $x.right \neq \text{NIL}$ 
2      return TREE-MINIMUM( $x.right$ ) // leftmost node in right subtree
3  else // find the lowest ancestor of  $x$  whose left child is an ancestor of  $x$ 
4       $y = x.p$ 
5      while  $y \neq \text{NIL}$  and  $x == y.right$ 
6           $x = y$ 
7           $y = y.p$ 
8  return  $y$ 
```

Finding Successor in BST (Case 1)

- ▶ **Definition:** Successor $\rightarrow$ next node in inorder traversal (smallest key greater than current node).
- ▶ **Case 1: If right subtree exists**
 - ▶ Successor is the **minimum** node in the right subtree.
 - ▶ Use TREE-MINIMUM to find it.

Example:

- ▶ Successor of 15 $\rightarrow$ right subtree $\rightarrow$ smallest $\rightarrow$ 17.

Finding Successor in BST (Case 2)

- ▶ **Case 2: No right subtree**

- ▶ Go up the tree until coming from a left child.
- ▶ The parent at this point is the successor.

- ▶ **Example:**

- ▶ Successor of 13 → no right subtree → go up → first from left → 15.

- ▶ **Running time:**

$O(h)$ (path down or up)

Summary of BST Query Operations

▶ Binary Search Tree supports:

- ▶ SEARCH
- ▶ MINIMUM
- ▶ MAXIMUM
- ▶ SUCCESSOR
- ▶ PREDECESSOR

Theorem 12.2

The dynamic-set operations SEARCH, MINIMUM, MAXIMUM, SUCCESSOR, and PREDECESSOR can be implemented so that each one runs in $O(h)$ time on a binary search tree of height h .

Question?